


# HydroCon Standard 1200 Pit

Standard 1200mm pits with outlets for DN500 HydroCon pipes are now available.

The precast HydroCon pit saves considerable time on site when installing HydroCon pipe systems. Without the standard HydroCon pit, a pit would have to be formed up and constructed on site or one or more outlets punched out of a suitably sized precast pit.

4 x 175mm plastic encapsulated step irons with red and green reflectors are fitted at 300mm spacings.

Top of the riser is rebated to take a Class B GMS drop-in-grate, cover or additional riser if required.

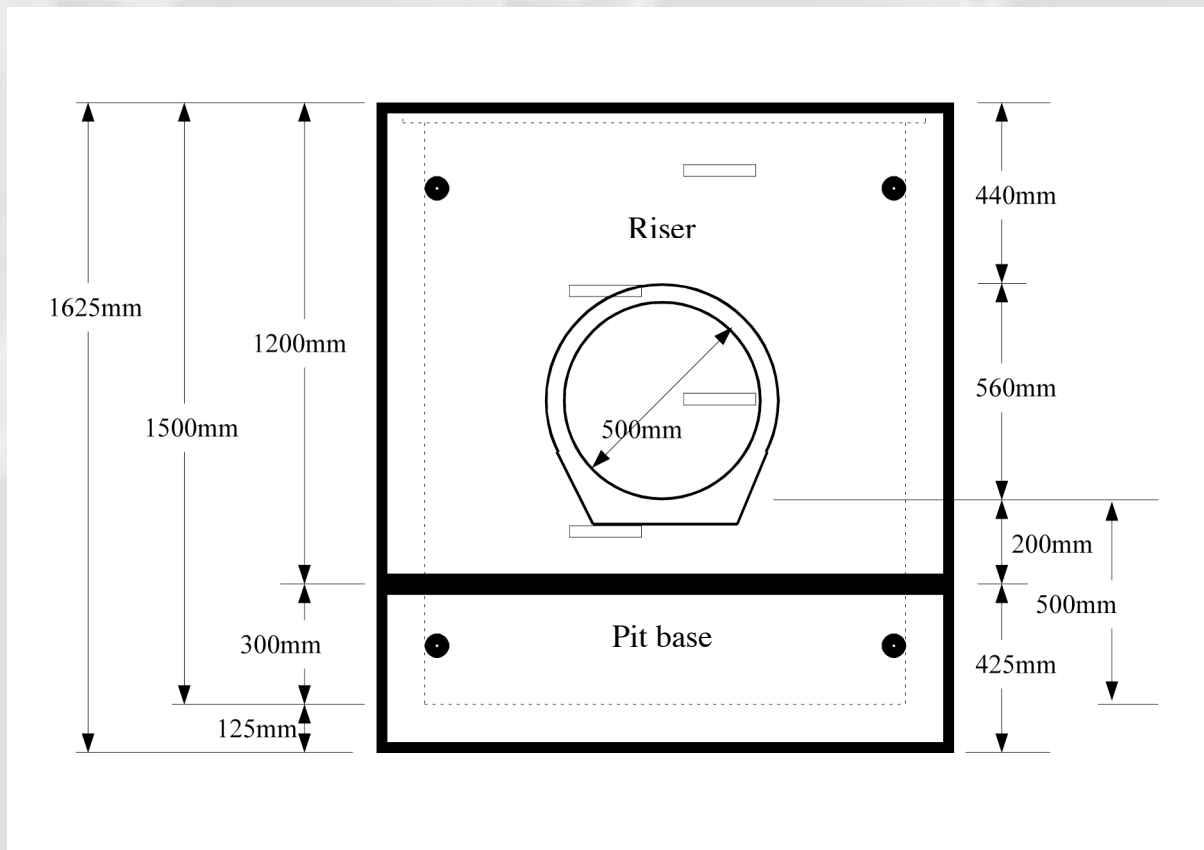

Pits are supplied in two sections: a pit base and 1200mm riser with a specified number of outlets (max 3).

Each section is fitted with 4 x 2.5 tonne *Swiftlift* pins for lifting with a spreader bar.

Minimum cover over a DN500 HydroCon pipe is 400mm.

Minimum sump required is 500mm. A riser can be inserted if greater sump depth is required.